



## NOTES




Valve pressed down for deflation




Valve pressed up for locking air


## TO DEFLATE INFLATABLE DOG BOAT RAMP




1. Clean and dry it, then open the valve

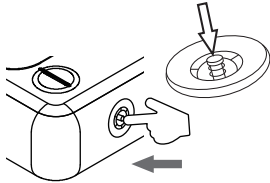


2. Press down on valve to release air

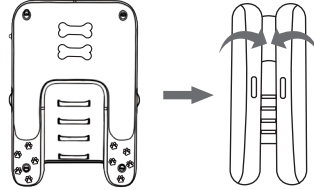


3. Deflate it completely, fold the left and right ends to the center



4. Roll into a cylinder from the bottom half



5. Tie it with a string and knot it

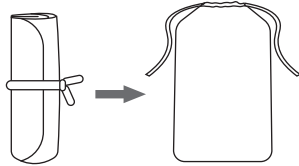

6. Pack and store it

## MAINTENANCE TIPS

- Rinse with fresh water after each use to remove salt/chlorine
- Store in a cool and dry place, avoid direct UV exposure

## REPAIR PATCH

The clear, self-adhesive patches for repairing punctures are included in the package.


- In the event of an accidental puncture, cut out a suitable size patch.
- Make sure you round the corners of your repair patch to avoid peeling.
- Make sure the area to be patched is clean and dry.
- Press patch firmly over the puncture. Do not inflate for 20 minutes.



# Linivon

## INFLATABLE DOG BOAT RAMP

Professional Water Training Ramp for Dogs

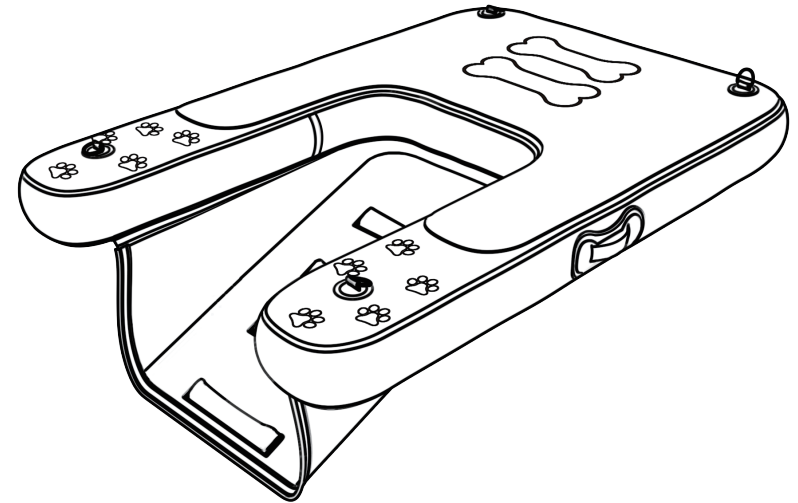

Model: DR-01

## User Manual

## WARRANTY & CUSTOMER SERVICE


We offer a 100% satisfaction guarantee and 12 months warranty! We provide a free replacement or money-back guarantee for any quality problems. If you have any questions about this product, please feel free to contact us at support@iLinivon.com

**24 Hours Customer Support:** Linivon Customer Service Team  
**Mail:** support@iLinivon.com

### ! WARNING

1. This product is not a life-saving device.
2. Please adhere to all local water safety rules and boating regulations.
3. For safety, it is recommended that your dog wear a life jacket before using this product.
4. It is recommended that the product be tied with a safety rope.
5. For best performance, inflate the dog boat ramp to 7 - 8psi.
6. Use only under adult supervision, no unsupervised dog training allowed.
7. Recommended for dogs weighing <108kg, >6 months of age and with no history of joint problems.
8. The water must be free of sharp objects and the water temperature is recommended to be 15-30°C.
9. 15 minutes of acclimatization training is required before first use.
10. Prohibition of use in flowing waters (rivers/oceans)
11. Do not scratch the product with sharp objects.




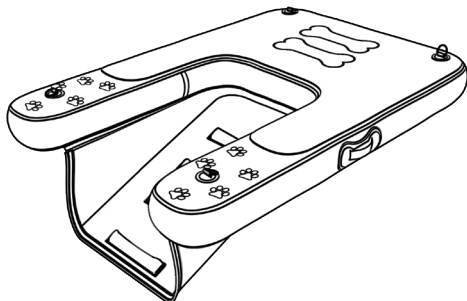




## PRODUCT SPECIFICATION




<b>Product Name:</b>	Inflatable Dog Boat Ramp
<b>Model:</b>	DR-01
<b>Load Capacity:</b>	240LBS
<b>Recommended Pressure:</b>	7.25PSI
<b>Product Size:</b>	61*42*6.2 inches
<b>Package Size:</b>	20*11.8*8.2 inches

1

## PACKING LIST

 Inflatable Dog Boat Ramp	 3M/118 inch	 3M/118 inch	 Climbing Buckle*2
 Air Pump	 Patch	 Storage Bag	 Wrench


## TO INFLATE INFLATABLE DOG BOAT RAMP




1. Unroll inflatable dog boat ramp




2. Open valve

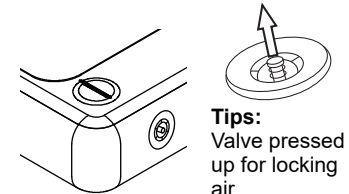


3. Check that the valve is locked

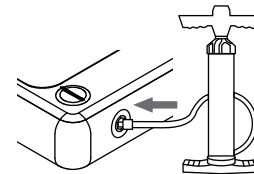


4. Securely connect pump nozzle to valve

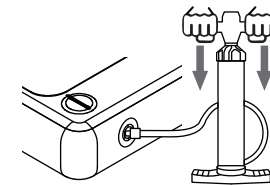

5. Hold pump firmly and fill with air by raising and lowering handle

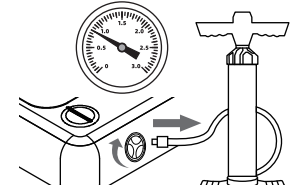

6. Inflate to 7-8 psi. Do not over-inflate. Remove pump nozzle and reattach valve cap

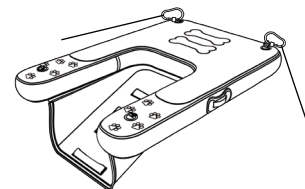

7. Attach the carabiner to the D-ring and tie the other end of the rope to any sturdy object.

2